



/// 2014 OFF-ROAD



CONQUER **DIRT**

CONQUERDIRT

/// WHY DO WE RIDE?

YOU KNOW TO ACCELERATE AND NEVER HESITATE. THE ONLY TIME YOU 'WHIP' OR 'SCRUB' IS AT THE TRACK. YOU UNDERSTAND WHAT "SKIMMING THE WHOOPS" MEANS. BECAUSE THERE ARE NO TIMEOUTS, HALFTIMES OR PIT STOPS. IT'S ONE OF THE ONLY SPORTS WHERE COURAGE IS A NECESSITY, NOT AN ADVANTAGE. IT'S FOR EVERY BRAAAP THAT SENDS CHILLS DOWN YOUR SPINE. GRAB THE HANDLEBARS AND KICK OVER YOUR BIKE. THE ROAR UNDERNEATH YOU IS NOT THAT OF AN INANIMATE MACHINE, IT'S A REFLECTION OF YOUR SOUL. IT'S BECAUSE YOU RIDE OFF-ROAD AND YAMAHA IS YOUR BIKE.

**ON FOUR WHEELS, YOU ARE
A SPECTATOR. ON TWO,
YOU CONQUER DIRT.**

/// LIBERATED



CONQUERDIRT



Professional rider depicted on a closed course.

YZ450F



YAMAHA BLUE

PURPLISH WHITE



Deep, usable powerband and mass centralization for lightweight, easy cornering.



Totally revised engine.



Graphics are impregnated directly into the plastic.



Adjustable handlebar clamps offer a total of 4 different handlebar positions.

SPECIFICATIONS	YZ450F
Engine Type	449.7 cc, 4-stroke, liquid-cooled, DOHC, 4-valve (titanium), single
Bore & Stroke	97 x 60.8 mm
Compression Ratio	12.5:1
Fuel Delivery	Keihin 44 mm throttle body F.I.
Ignition	TCI / Kick
Transmission	5-speed
Final Drive	Chain
Suspension/Front	Adj. 48-mm, inverted fork / 310-mm (12.2") travel
Suspension/Rear	Fully adj. Monocross / 315-mm (12.4") travel
Brakes/Front	250-mm, floating disc / twin-piston caliper
Brakes/Rear	245-mm, disc / single-piston caliper
Tire/Front	80/100-21
Tire/Rear	120/80-19
L x W x H	2,175 x 825 x 1,290 mm (86.6" x 32.5" x 50.8")
Seat Height	975 mm (38.4")
Ground Clearance	335 mm (13.2")
Wheelbase	1,480 mm (58.3")
Wet Weight	111 kg (245 lb)
Fuel Capacity	7.5 litres (1.7 imp. gal.)



Professional rider depicted on a closed course.

YZ250F



YAMAHA BLUE

PURPLISH WHITE



Balance of easy cornering, lightweight and compact feeling thanks to excellent mass centralization.



All-new fuel-injected "reversed" engine.



Washable, dual-stage, foam air filter.



Adjustable handlebar clamps offer a total of 4 different handlebar positions.

SPECIFICATIONS	YZ250F
Engine Type	250 cc, 4-stroke, liquid-cooled, DOHC, 4-valve (titanium), single
Bore & Stroke	77 x 53.6 mm
Compression Ratio	13.5:1
Fuel Delivery	44 mm Keihin throttle body F.I.
Ignition	TCI / Kick
Transmission	5-speed
Final Drive	Chain
Suspension/Front	Adj. 48-mm, inverted fork / 310-mm (12.2") travel
Suspension/Rear	Fully adj. Monocross / 315-mm (12.4") travel
Brakes/Front	250-mm, floating disc / twin-piston caliper
Brakes/Rear	245-mm disc / single-piston caliper
Tire/Front	80/100-21
Tire/Rear	100/90-19
L x W x H	2,165 x 825 x 1,280 mm (85.2" x 32.5" x 50.4")
Seat Height	965 mm (38")
Ground Clearance	325 mm (12.8")
Wheelbase	1,475 mm (58.1")
Wet Weight	105 kg (231 lb)
Fuel Capacity	7.5 litres (1.7 imp. gal.)



Professional rider depicted on a closed course.


YZ250



YAMAHA BLUE



“Speed-Sensitive System”, Kayaba cartridge fork features a twin-chamber design.



YPVS power valve system.



Lightweight, titanium footpegs.



Lightweight, aluminum, semi-double-cradle style frame.

SPECIFICATIONS	YZ250
Engine Type	249 cc, 2-stroke, liquid-cooled, reed-valve, single
Bore & Stroke	66.4 x 72 mm
Compression Ratio	8.9~10.6:1
Fuel Delivery	Keihin PWK38S
Ignition	CDI / Kick
Transmission	5-speed
Final Drive	Chain
Suspension/Front	Adjustable 48-mm inverted fork / 300-mm (11.8”) travel
Suspension/Rear	Fully adjustable link Monocross / 315-mm (12.4”) travel
Brakes/Front	250-mm floating disc / twin piston
Brakes/Rear	245-mm disc / single piston
Tire/Front	80/100-21
Tire/Rear	110/90-19
L x W x H	2,184 x 827 x 1,309 mm (86” x 32.6” x 51.5”)
Seat Height	997 mm (39.3”)
Ground Clearance	385 mm (15.2”)
Wheelbase	1,481 mm (58.3”)
Wet Weight	103 kg (227 lb)
Fuel Capacity	8 litres (1.8 imp. gal.)



Professional rider depicted on a closed course.

YZ125



YAMAHA BLUE



Compact Nissin twin-piston front caliper.



6-petal, carbon fiber reed design.



Adjustable handlebar mounts.



Heavy-duty 520 gold anodized "O"-ring chain.

SPECIFICATIONS	YZ125
Engine Type	124 cc, 2-stroke, liquid-cooled, crankcase reed-valve, single
Bore & Stroke	54.0 x 54.5 mm
Compression Ratio	8.6~10.7:1
Fuel Delivery	Mikuni TMX x 38
Ignition	CDI / Kick
Transmission	6-speed
Final Drive	Chain
Suspension/Front	Adjustable 48-mm inverted fork / 300-mm (11.8") travel
Suspension/Rear	Fully adjustable link Monocross / 315-mm (12.4") travel
Brakes/Front	250-mm floating disc / twin piston
Brakes/Rear	245-mm disc / single piston
Tire/Front	80/100-21
Tire/Rear	110/90-19
L x W x H	2,139 x 827 x 1,318 mm (84.2" x 32.6" x 51.9")
Seat Height	998 mm (39.3")
Ground Clearance	388 mm (15.3")
Wheelbase	1,443 mm (56.8")
Wet Weight	94 kg (207 lb)
Fuel Capacity	8 litres (1.8 imp. gal.)



Professional rider depicted on a closed course.

YZ85



YAMAHA BLUE



Clutch cover features a quick-remove sub-cover for fast, easy clutch access.



“Shorty style” adjustable front brake lever.



Crankcase reed-valve induction.



Lightweight, adjustable 36-mm inverted Kayaba cartridge fork.

SPECIFICATIONS	YZ85
Engine Type	85 cc, 2-stroke, liquid-cooled, crankcase reed-valve, single
Bore & Stroke	47.5 x 47.8 mm
Compression Ratio	8.2:1
Fuel Delivery	Keihin PWK28
Ignition	CDI / Kick
Transmission	6-speed
Final Drive	Chain
Suspension/Front	Adjustable 36mm inverted fork / 275-mm (10.8”) travel
Suspension/Rear	Fully adjustable link Monocross / 282-mm (11.1”) travel
Brakes/Front	220-mm disc / twin piston
Brakes/Rear	190-mm disc / single piston
Tire/Front	70/100-17
Tire/Rear	90/100-14
L x W x H	1,822 x 758 x 1,161 mm (71.7” x 29.8” x 45.7”)
Seat Height	864 mm (34”)
Ground Clearance	351 mm (13.8”)
Wheelbase	1,258 mm (49.5”)
Wet Weight	71 kg (157 lb)
Fuel Capacity	5 litres (1.1 imp. gal.)




Professional rider depicted on a closed course.

WR450F



YAMAHA BLUE

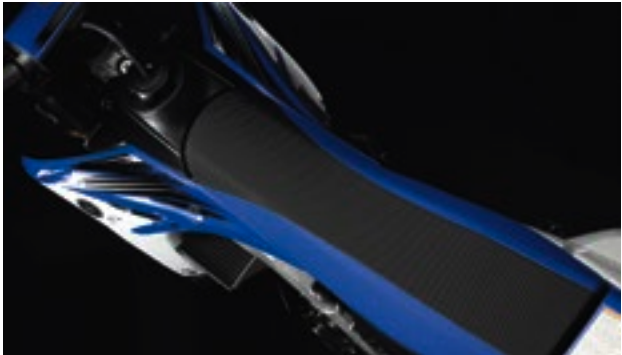

Slim YZ-inspired bodywork allows for easy rider movement.



Fuel-injected, 5-valve, 4-stroke powerplant.



Extra wide 55 mm stainless steel footpegs.



Sophisticated digital display and system information centre.

SPECIFICATIONS	WR450F
Engine Type	449 cc, liquid-cooled, DOHC, 5-valve (titanium), single
Bore & Stroke	95 x 63.4 mm
Compression Ratio	12.3:1
Fuel Delivery	Keihin 42-mm throttle body F.I.
Ignition	TCI / Electric & Kick
Transmission	Wide ratio 5-speed
Final Drive	“O”-ring chain
Suspension/Front	Adj. 48-mm inverted fork / 300-mm (11.8”) travel
Suspension/Rear	Fully adj. Link Monocross /294-mm (11.6”) travel
Brakes/Front	250-mm floating disc / twin-piston caliper
Brakes/Rear	245-mm disc / single piston-caliper
Tire/Front	80/100-21
Tire/Rear	120/90-18
L x W x H	2,160 x 825 x 1,275 mm (81” x 32.5” x 50.2”)
Seat Height	960 mm (37.8”)
Ground Clearance	335 mm (13.2”)
Wheelbase	1,465 mm (57.7”)
Wet Weight	124 kg (273.5 lb)
Fuel Capacity	7.5 litres (1.7 Imp. gal.)



Professional rider depicted on a closed course.

TT-R230



YAMAHA BLUE



Proven engine provides smooth, easy power. Adjustable Monocross rear suspension.



"Bar-type" engine protector

Front 220-mm disc with twin-piston caliper.



21" front and 18" rugged rear aluminum rims reduce weight.

SPECIFICATIONS	TT-R230
Engine Type	223 cc, 4-stroke, air-cooled, SOHC, 2-valve, single
Bore & Stroke	70 x 58 mm
Compression Ratio	9.5:1
Fuel Delivery	Teikei Y26P
Ignition	CDI / Electric
Transmission	6-speed w/manual clutch
Final Drive	"O"-ring chain
Suspension/Front	36-mm fork / 240-mm (9.4") wheel travel
Suspension/Rear	Adjustable link-type Monocross / 220-mm (8.7") wheel travel
Brakes/Front	220-mm disc - twin-piston caliper
Brakes/Rear	Drum
Tire/Front	80/100-21
Tire/Rear	100/100-18
L x W x H	2,065 x 800 x 1,180 mm (81.3" x 31.5" x 46.5")
Seat Height	870 mm (34.3")
Ground Clearance	295 mm (11.6")
Wheelbase	1,385 mm (54.5")
Wet Weight	114 kg (251 lb)
Fuel Capacity	8 litres (1.8 imp. gal.)



Professional rider depicted on a closed course.

TT-R125L / LE



YAMAHA BLUE - L MODEL

YAMAHA BLUE - LE MODEL



Choose electric (LE) or kick (L) starting. Proven 4-stroke reliability and smooth power.



Front 220-mm disc with twin-piston caliper.



Mikuni VM20 carburetor.



Slim YZ-F inspired bodywork allows for easy rider movement.

SPECIFICATIONS	TT-R125L/LE
Engine Type	124 cc, 4-stroke, air-cooled, SOHC, 2-valve, single
Bore & Stroke	54 x 54 mm
Compression Ratio	10:1
Fuel Delivery	Mikuni VM20
Ignition	CDI / Kick / LE: CDI / Electric & kick
Transmission	5-speed w/manual clutch
Final Drive	Chain
Suspension/Front	31-mm fork / 180-mm (7.1") wheel travel LE: Adjustable 31-mm fork / 180-mm (7.1") wheel travel
Suspension/Rear	Adjustable link-type Monocross / 168-mm (6.6") wheel travel
Brakes/Front	220-mm disc - twin-piston caliper
Brakes/Rear	Drum
Tire/Front	70/100-19
Tire/Rear	90/100-16
L x W x H	1,900 x 795 x 1,085 mm (74.8" x 31.3" x 42.7")
Seat Height	805 mm (31.7")
Ground Clearance	295 mm (11.6")
Wheelbase	1,270 mm (50")
Wet Weight	84kg (185 lb) / LE: 90 kg (198 lb)
Fuel Capacity	6 litres (1.3 imp. gal.)



TT-R110E



YAMAHA BLUE



Exhaust system is quiet and comes equipped with a "cleanable" screen-type spark arrestor.



4-speed, semi-automatic transmission.



Leading axle 31-mm hydraulic front fork.



Rugged YZ-F inspired plastics resist damage.

SPECIFICATIONS	TT-R110E
Engine Type	110 cc, 4-stroke, air-cooled, SOHC, 2-valve, single
Bore & Stroke	51 x 54 mm
Compression Ratio	9.3:1
Fuel Delivery	Mikuni VM16
Ignition	CDI / Electric & kick
Transmission	4-speed, semi-automatic (automatic clutch)
Final Drive	Chain
Suspension/Front	31-mm hydraulic fork / 115-mm (4.5") wheel travel
Suspension/Rear	Monocross, single shock / 110-mm (4.3") wheel travel
Brakes/Front	Drum
Brakes/Rear	Drum
Tire/Front	2.50 x 14
Tire/Rear	3.00 x 12
L x W x H	1,565 x 680 x 923 mm (61.6" x 26.8" x 36.3")
Seat Height	670 mm (26.4")
Ground Clearance	180 mm (7.1")
Wheelbase	1,080 mm (42.5")
Wet Weight	72 kg (159 lb)
Fuel Capacity	3.8 litres (0.8 imp. gal.)



TT-R50E



YAMAHA BLUE

SPECIFICATIONS	TT-R50E
Engine Type	50 cc, 4-stroke, air-cooled, SOHC, 2-valve, single
Bore & Stroke	36 x 48.6 mm
Compression Ratio	9.5:1
Fuel Delivery	Mikuni VM11
Ignition	CDI / Electric
Transmission	3-speed, semi-automatic (automatic clutch)
Final Drive	Chain
Suspension/Front	22-mm inverted fork / 96-mm (3.8") wheel travel
Suspension/Rear	Monocross / 71-mm (2.8") wheel travel
Brakes/Front	Drum
Brakes/Rear	Drum
Tire/Front	2.50-10
Tire/Rear	2.50-10
L x W x H	1,305 x 595 x 795 mm (51.4" x 23.4" x 31.3")
Seat Height	555 mm (21.9")
Ground Clearance	135 mm (5.3")
Wheelbase	925 mm (36.4")
Wet Weight	57 kg (126 lb)
Fuel Capacity	3 litres (0.66 imp. gal.)



PW50



YAMAHA BLUE

SPECIFICATIONS	PW50
Engine Type	49 cc, air-cooled, reed-valve, 2-stroke, single
Bore & Stroke	40 x 39.2 mm
Compression Ratio	6.0:1
Fuel Delivery	Mikuni VM12SC
Ignition	CDI / Kick
Lubrication	Autolube Oil Injection
Transmission	Single-speed automatic (no clutch)
Final Drive	Shaft
Suspension/Front	22-mm fork / 60-mm (2.4") wheel travel
Suspension/Rear	Unit swingarm / 50-mm (2") wheel travel
Brakes/Front	Drum
Brakes/Rear	Drum
Tire/Front	2.50-10
Tire/Rear	2.50-10
L x W x H	1,245 x 575 x 715 mm (49" x 22.6" x 28.1")
Seat Height	485 mm (19.1")
Ground Clearance	105 mm (4.1")
Wheelbase	855 mm (33.7")
Wet Weight	39 kg (86 lb)
Fuel Capacity	2 litres (0.4 imp. gal.)

ACCESSORIES: FOR FUN IN THE DIRT

/// PERFORMANCE



RACE-INSPIRED ACCESSORIES DESIGNED TO PERFORM AND PLEASE.
STARTING FROM \$121.95

/// PROTECTION & MAINTENANCE



BOOST IT UP AND PROTECT YOUR BIKE FOR A LIFETIME OF TRAIL RIDING.
STARTING FROM \$27.95

/// SHARK® HELMETS



RIDE IN COMFORT, STYLE AND SAFETY WITH SHARK HELMETS.
STARTING FROM \$159.95

WANT TO SEE MORE? VISIT YAMAHA-MOTOR.CA/PNA

/// GEAR



WE OFFER A GREAT SELECTION OF QUALITY BRAND NAME RIDING AND CASUAL GEAR FOR YOUR STYLE OF OFF-ROAD RIDING.
STARTING FROM \$24.95

MULTI PURPOSE CARE

YAMALUBE® PRODUCTS FOR MOTORCYCLES

YAMALUBE MAINTENANCE



Off-Road Chain Lube

Our proprietary mixture of moly. PTBE and wax makes this one of the best chain lubes available for either O-ring or conventional chains.



Biodegradable Air Filter Oil & Cleaner Kit

Dirt-grabbing, water, gas- and solvent-resistant, super-tacky, non-alcohol-based filter oil and a heavy-duty, concentrated detergent.

YAMALUBE QUALITY CARE PRODUCTS



Yamaclean® Instant Detailer

This waterless wash and detailer cleans, shines and protects virtually any surface on your Yamaha. Its organic polymer leaves a natural shine with a protective anti-static finish.



Yamaclean Pro-Wash Spray

Biodegradable vehicle spray that removes grease and grime. Rinses clean and keeps your vehicle looking new.



DO YOU YAMALUBE?

Using car oil in your Yamaha may lead to unnecessary engine wear and reduced performance. Trust the oil that is engineered by the same people who built your Yamaha. Yamalube - quality lubricants specifically formulated for your Yamaha.



Ring Free Plus

Removes carbon and protects fuel system metals from ethanol fuel corrosion. 100 ml travel size treats 19 L of gas.



Fuel Stabilizer & Conditioner PLUS

Helps resist phase separation, deters ethanol corrosion and keeps stored fuel fresh. 100 ml travel size treats 19 L of gas.

YAMALUBE ADDITIVES



20W-50 Semi-Synthetic Oil

Specially blended for off-road, this JASO MA-certified, semi-synthetic oil provides excellent lubricity, as well as smooth shifting and clutch engagement.

YAMALUBE OIL



DIY WITH A YAMALUBE OIL CHANGE KIT

Yamalube is formulated with assistance from the same team of engineers that design and test Yamaha engines. Our engineers have access to proprietary information and specifications; nobody knows Yamaha engines better than they do! For your convenience, we have developed a wide range of Yamalube "Do It Yourself" oil change kits. These kits are model-specific and include oil, oil filter, drain gaskets, gloves and general instructions.

Selected kits are available in 3 different oil grades for normal, hot or cold weather use. Check our website for more details.

/// YAMAHA-MOTOR.CA



CONQUER DIRT

Review your Yamaha Owner's Manual. Before each ride, check all your equipment. Always wear an approved helmet, eye protection, long-sleeved shirt, long pants, gloves and boots. Never ride an off-road motorcycle on paved surfaces or public roads; never carry passengers; never engage in stunt riding and avoid excessive speed. Provide parental supervision when a motorcycle is being operated by a minor. Every motorcycle rider should be aware of the limits of his or her skills, experience and abilities and ride accordingly. Beginners should be extremely cautious and allow extra time and distance for manoeuvring and braking. All riders should ride well within the limits of their abilities, never beyond them. Do not drink or take drugs and ride. The riders used during photography of this brochure are highly skilled, experienced riders. All of the action was shot on a closed course, and is not intended to be duplicated in any way. All information, specifications and appearance of Yamaha products shown herein are subject to change without notice. Some U.S. models shown.

Yamaha Motor Canada Ltd. reserves the right, at any time, to discontinue or change specifications, prices, designs, features, accessories or equipment without incurring any obligation or liability. Although the content of this brochure is believed to be accurate at time of printing, precision cannot be guaranteed. Some images depicted herein may include optional equipment or are sold separately. Prices are based on Manufacturer's Suggested Retail Prices. Dealers are at liberty to set their own pricing. Taxes and installation of accessories are not included in prices shown. See your Yamaha dealer for the most up-to-date and accurate information.

This document contains many of the valuable trademarks and service marks owned and used by Yamaha throughout the world. This document may also contain references to other company, brand, and product names that may be the trademarks/service marks of their respective owners. These company, brand, and product names are used herein for identification purposes only, and references to any names, marks, products or services of third parties do not constitute or imply endorsement, sponsorship or recommendation of the third party or the products or services.

Yamaha Motor Canada Ltd., 480 Gordon Baker Road, Toronto, ON M2H 3B4



Printed in Canada 12/13
MKG-14MCE-DB-01

Professional rider depicted on a closed course.

